

Phantom 300



TUTTO IN UNO

Il Phantom 300 rappresenta il modello più venduto della flotta Sea Water. Il suo approdo sul mercato ha reso questo modello un vero e proprio benchmark per i gommoni di 10 metri.

Come per ogni Sea Water che si rispetti anche sul Phantom 300 troviamo tanto spazio in coperta, con un layout funzionale che pone al primo posto il comfort dei passeggeri sia in navigazione che quando si è all'ancora.

Il grande tubolare permette di navigare in piena sicurezza in ogni condizione di mare e combinato all'eccezionale carena su cui si adagia, fornisce delle prestazioni sempre al top, anche quando le onde si fanno più cattive.

Eleganza nel look e sportività nell'essenza, ecco la vera chiave del successo di questo modello.

Una combinazione di emozioni che lasciano senza fiato.





ALL IN ONE


The Phantom 300 represents the best-selling model in the Sea Water fleet. Its arrival on the market has made this model a true benchmark for 10-meter inflatable boats.

As with any self-respecting Sea Water, on the Phantom 300 we find plenty of space on deck, with a functional layout that puts passenger comfort first both when sailing and when at anchor.

The large tubular makes it possible to navigate safely in all sea conditions and combined with the exceptional hull on which it rests, it provides performance that is always at the top, even when the waves get meaner.

Elegance in look and sportiness in essence, here is the real key to the success of this model.

A combination of emotions that leave you breathless.

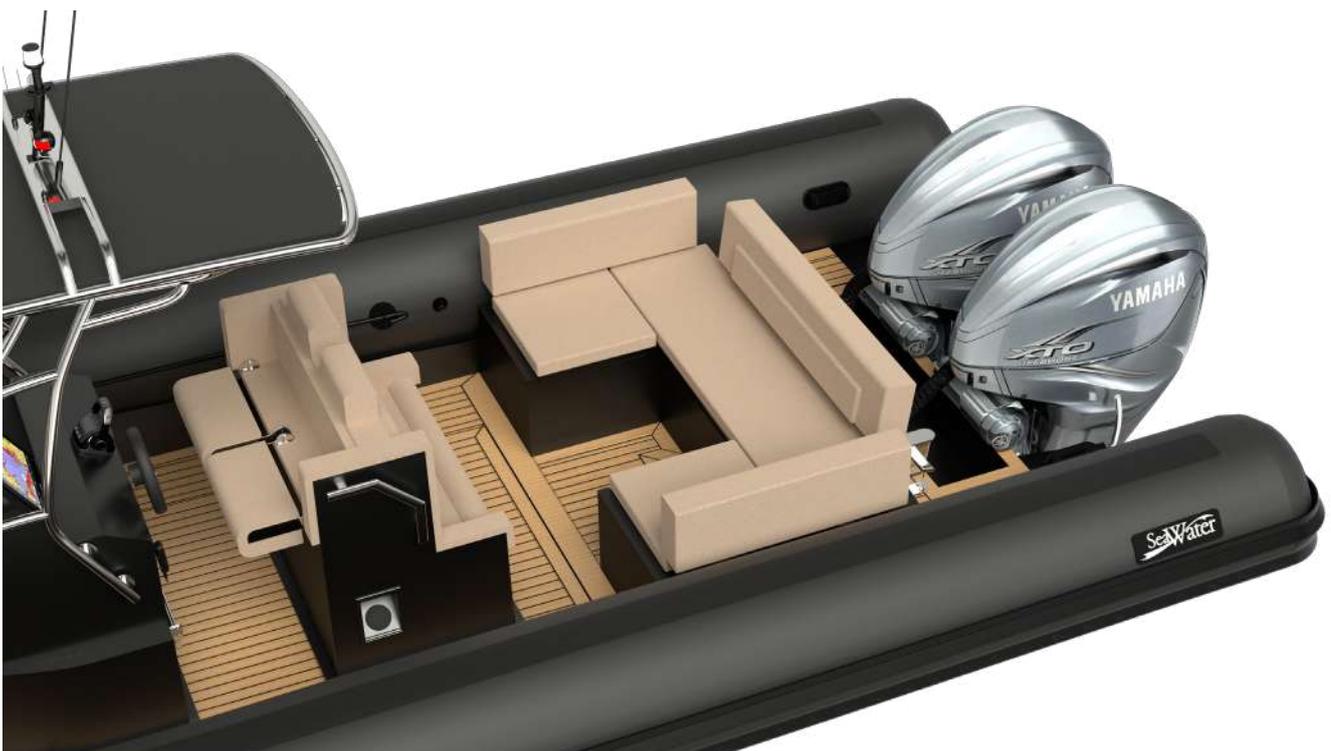





**Le immagini riprodotte nella presente brochure sono puramente indicative e riportate a scopo illustrativo. Pertanto potrebbero differire dal reale aspetto dell'imbarcazione.*

**The images reproduced in this brochure are purely indicative and reported for illustrative purposes. Therefore they could differ from the real aspect of the boat.*





Phantom 300

General characteristics

Motorization	n.	hp	kW
Yamaha	2	350	520
Yamaha	2	325	484
Yamaha	2	300	447
Speed		Cruising	Max
Speed at 1/3 displacement loaded		37kts	45kts
Range		153nm	67nm
Main sizes		m	ft
Loa = overall length (std. ISO8666)		9,9	32,06
Lh = hull length (std. ISO8666)		9,5	31,02
Lg = waterline length (boat fully laden)		9,7	31,1
Maximum beam		3,4	11,02
Depth under propellers (boat fully laden)		0,95	3,01
H = overall height from keel to hard top		2,8	9,02
Ht = minimum transport height from keel		3,3	10,1
P = pulpit		0	0
Capacity		lt	USgals
Standard fuel tank		460	122
Water tank		60	16
Displacement		ton	lb
Unladen		3,9	5518
Laden		6,6	10790
Guests			
Max. number of guests			20
Navigation category CE 94/25			B
Certification modules		B	UDICER
Hull type			Monohedron
Deadrise			22° and spray rails

Performance specifications:

Performances are estimated at standard version displacement of the yacht (3,3 ton/7275 lb), at 1/3 of load, clean hull, 25° C air temperature, good weather conditions and special props stotted for these conditions. If overloading the yacht by 0,2 ton/440,92 lb, top speed decreases of 1 kts.

Building materials:

Building process: HLU hand lay up - Materials: reinforced E glass fibre; core PVC closed cell, Okumé and PU polyester isofaltic resin - Lamination process: single skin laminate (bottom) and sandwich (sides and deck)



KYMERAYACHT S.R.L.

SEDE LEGALE: via Giuseppe Meralli 24A, 09129, Cagliari (Ca)
SEDE OPERATIVA: Z.I. Macchiareddu, Strada Tre SNC, 09032, Assemini (Ca)
P. IVA: 03801300926 - *TELEFONO:* +39.392.591.4869
PEC: kymerayacht@pec.it *EMAIL:* kymerayacht@gmail.com
www.seawater.it